



UDEY FASTENERS

UDEY FASTENERS' - We are pleased to introduce ourselves as one of the leading Manufacturer & Supplier of Mild Steel & High Tensile Fasteners under the brand name UFI ' is a fast growing, vertically integrated and professionally managed unit having state of all vertical line process.

Our products are standard in accordance with BS/DIN/ASTM/ISO/AS/IS/JIS/ANSI etc. specifications and non- standard as per customer's requirement. Our product range starts from M5 to M54 Dia.

Our prices are most competitive with time bound delivery, even our motto is quality products, timely delivery and competitive price.

Our infrastructure is the backbone of our company. Leveraging on the infrastructural facility, we boast of producing both quantitative and qualitative range of Guard Rail Round Head Bolts, Hex Head Bolts, Nut Washers etc. Our manufacturing unit is facilitated by advanced machines and equipment with cutting edge technology, which is meticulously maintained by the skilled workforce. Our installed machinery is in perfect working conditions to ensure maximum output.

RANGE OF OUR PRODUCTS

GUARD RAIL BOLTS / BUTTON HEAD BOLTS

These kinds of bolt are mainly used in the installation of Road Crash Barriers/ Guard Rails at the road sides and turning points of roads to safeguard the fatal accidents and the safety of vehicles. We manufacture these Bolts as per customer's requirement.

Sizes:	M12 to M16
Grades:	4.6, 4.8, 5.6, 6.8, 8.8, 10.9
Finishes:	Self, Auto black, Hot dip galvanize and Zinc Plated
Standards:	DIN, ISO, BS, RAL, As per drawing



HEX HEAD BOLTS

We provide Hex bolts in various types.

Sizes:	DIA M8 to M36 and length from 12mm to 900mm.
Grades:	All grades 4.6, 4.8, 5.6, 6.8, 8.8, 10.9, B7, L7, A325, A394, A2-70 etc.
Finishes:	Auto Black, HDG, Zinc Plated, PTFE, Teflon, Xylon, Cadmium, dichromate, Rilson, Nickel etc.
Standards:	As per all IS, ISO, DIN, ANSI, BS, ASTM, JIS Standards & non-standard as per customers drawing.



CARRIAGE BOLTS

Our carriage bolts are available in variety of diameters, length and sizes to fit for different needs of the customers. We offer our range in numerous sizes and thickness in accordance with the requirements and specifications from the client's end.



Sizes: M6 to M24
Grades: 4.6, 4.8, 5.6, 8.8, 10.9
Finishes: Auto Black, HDG, Zinc Plated, PTFE, Teflon, Xylon, Cadmium, dichromate, Rilson etc.
Standards: DIN-603/ IS:2609/ ISO-8677/ BS-4933




THREADED RODS / STUDS

Our company is counted among the leading manufacturers of best quality range of studs. These studs can be availed in different dimensions as per the requirement of the client. Studs may be full threaded, half threaded & double ended.

Sizes: DIA M5 to M72 and length up to 3000mm or equivalent in inches series.
Grades: All grades 5.6, 8.8, 10.9, B7, L7 etc.
Finishes: Auto Black, HDG, Zinc Plated, PTFE, Teflon, Xylon, dichromate, Rilson etc.
Standards: IS 1862, ASTM A193, DIN 975/976 and as per customers drawing



UDEY FASTENERS

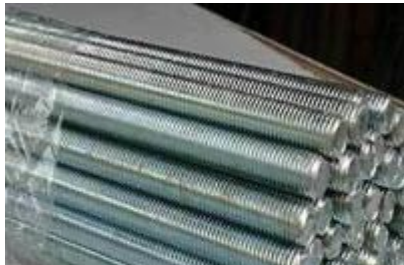



HEX NUTS

We are producing Hex Nuts, Heavy Hex Nut, Long Nuts, Lock Nuts, Flange Nuts and Nylock Nuts.

Sizes:	M5 to M54
Grades:	4, 5, 6, 8, 10
Finishes:	Auto Black, HDG, Zinc Plated, PTFE, Teflon, Xylon, Cadmium, dichromate, .
Standards:	As per all IS, ISO, DIN, ANSI, BS, ASTM, JIS Standards



SPRING WASHERS

Sizes:	M5 to M72
Grades:	En42 Steel
Finishes:	Black, HDG, Mech. Galv, Zinc plated
Standards:	DIN 127, IS: 4072, IS: 3063



UDEY FASTENERS



PLAIN WASHERS

We are offering various sizes of Flat Washers which are used to support the load of fasteners.

Sizes: DIA from M5 to M72

Finishes: All Finishes

Standards: DIN 125, DIN126, ANSI/ASME B18.22.1, ASTM F-436, DIN 440, DIN 446, DIN 9021, DIN 7989,



MISCELLANEOUS FASTENERS AS PER CUSTOMER SAMPLES OR DRAWINGS

DIN 6916, , ISO 7416, ISO 7089, ISO 7091, IS:2016, BS4320 etc.



UDEY FASTENERS



Flange Bolts

We specialized in production of wide range of Flange Bolt and Collar Bolts. These bolts are produced with high accuracy as per standard.



UDEY FASTENERS



Socket Head Cap Screw (DIN 912 / ISO 4762)

We supply a comprehensive range of Socket Head Cap Screw (DIN 912 / ISO 4762). All these items are manufactured as per international standards or customers' specification.



KAY'S



Nut Types



Hex

A six sided nut. Also referred to as a Finished Hex Nut.



Heavy Hex

A heavier pattern version of a standard hex nut.



Nylon Insert Lock

A nut with a nylon insert to prevent backing off. Also referred to as a Nylock.



Jam

A hex nut with a reduced height.



Nylon Insert Jam Lock

A nylock nut with a reduced height.



Wing

A nut with 'wings' for hand tightening.



Cap

A nut with a domed top over the end of the fastener.



Acorn

Acorn nuts are a high crown type of cap nut, used for appearance.



Flange

A nut with a built in washer like flange.



Tee

A nut designed to be driven into wood to create a threaded hole.



Square

A four sided nut.



Prevailing Torque Lock

A non-reversible lock nut used for high temperature applications.




K-Lock or Kep

A nut with an attached free-spinning external tooth lock washer.



Coupling

Coupling nuts are long nuts used to connect pieces of threaded rod or other male fasteners.



Slotted

Slotted nuts are used in conjunction with a cotter pin on drilled shank fasteners to prevent loosening.



Castle

Castle nuts are used in conjunction with a cotter pin on drilled shank fasteners to prevent loosening.



Wood Screws (WS)



Machine Screws (MS)



**Thread Cutting
Machine Screws**



Sheet Metal Screws (SMS)



Self Drilling SMS



Hex Bolts



Carriage Bolts



Lag Bolts



Socket Screws



**Set
Screws**



Eye Bolts



Eye Lags



Flat

A flat washer used to distribute load. Available in SAE, USS and other patterns.



Fender

An oversized flat washer used to further distribute load especially on soft materials.



Finishing

A washer used to obtain a 'finished' look. Usually used with oval head screws.



Split Lock

The most common style of washer used to prevent nuts and bolts from backing out.



External Tooth Lock

A washer with external 'teeth'. Used to prevent nuts and bolts from backing out.



Internal Tooth Lock

A washer with internal 'teeth'. Used to prevent nuts and bolts from backing out.



Square

A square shaped washer.



Dock

Dock washers have a larger outside diameter and are thicker than standard.



041 Hex Nut




042 Hex Jam Nut




043 Self Locking Nut Nylon Insert




044 Self Locking Domed Cap Nut with Nylon Insert




045 Hex Long Nut



046 Hex Domed Cap Nut




047 Hex Flange Nut without Serration




048 Hex Serrated Flange Nut




049 Wing Nut




050 Tee Nut




051 Crimp Nut Flat Hd




052 Crimp Nut CSK Hd



053 Cage Nut



054 Eye Nut



055 Square Weld Nut



056 Hex Weld Nut



057 Safety Nut



058 Insert



059 Self Push Nut



060 Circular Nut




061 Spring Pin



062 Spring Pin Wave




063 Dowel Pin with Internal Thread




064 Dowel Pin




065 Parallel Pin



066 Taper Pin



067 Taper Pin with Internal Thread



068 Cotter Pin



069 Snap Pin



070 Snap Pin




071 Cross Recessed Flat Hd Wood Screw




072 Cross Recessed Rd Hd Wood Screw




073 Hex Lag Screw



074 Slotted Rd Hd Wood Screw



075 Slotted Flat Hd Wood Screw



076 Slotted Oval Hd Wood Screw



077 Hanger Bolt



078 Drywall Screw



079 Chipboard Screw



080 Raised CSK Chipboard Screw